


PVG-500/PVG-500S/PVG-502S

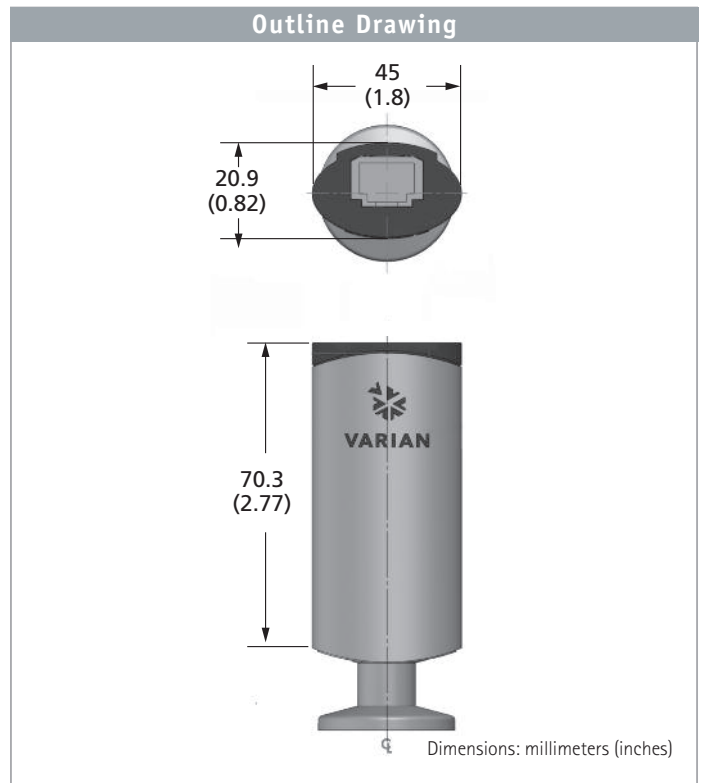

The Varian PVG-500 series of Pirani gauges provides the ultimate combination of state-of-art technology and ruggedness within a compact design. The PVG-500 series utilizes the most advanced digital Pirani technology combined with a stainless steel sensor design to meet the various needs of the market today.

Applications

- Fore pressure vacuum pressure monitoring
- Controlling high vacuum ionization gauges
- Safety monitoring in vacuum systems
- General vacuum measurement and control in the medium and rough vacuum range

Features

Compact, rugged aluminum housing that mounts in any orientation with a logarithmic signal output

Stainless steel sensor cell with metal-sealed feedthrough

Easy push button ATM and High Vacuum (HV) adjustment

Nickel filament option

Optional set points

Benefits

Ease of integration

Rugged design for a wide range of applications

Ease of set-up

Solution for corrosive applications

Utilize pressure readings to perform critical operations

PVG-500/PVG-500S/PVG-502S

Technical Specifications				
Measurement range (Air, O ₂ , CO, N ₂)	5 x 10 ⁻⁴ to 1000 mbar (3.75 x 10 ⁻⁴ to 750 Torr)			
Accuracy (N ₂)	% of reading	Units		
	± 15%	1 x 10 ⁻³ to 100 mbar (1 x 10 ⁻³ to 75 Torr)		
	± 50%	5 x 10 ⁻⁴ to 1 x 10 ⁻³ mbar (3.75 x 10 ⁻⁴ to 1 x 10 ⁻³ Torr)		
	± 50%	100 to 1000 mbar (75 to 750 Torr)		
Repeatability (Air)	1 x 10 ⁻³ to 100 mbar (1 x 10 ⁻³ to 75 Torr) – % of reading ± 2%			
Output signal (measurement signal)	Voltage range	Measurement range		
	0 to 10.3 V	1.9 to 10.0 V		
Voltage vs. pressure	1.286 V/decade, logarithmic			
Error signal	0 to 0.5 V (filament rupture)			
Minimum loaded impedance	10 kΩ, short-circuit proof			
Response time	80 ms			
Adjustment	One tactile switch for both ATM and HV adjustment			
Identification gauge	27 kΩ, referenced to supply common			
Setpoint	PVG-500	PVG-500S, PVG-502S		
	Setting range	None	2	
			2 x 10 ⁻³ to 500 mbar (1.5 x 10 ⁻³ to 375 Torr)	
			10% above lower threshold % of reading	
			30 VDC / 0.5 ADC floating	
Switching time		< 20 ms		
Supply voltage	At gauge	Ripple	Power consumption	
	14 to 30 VDC	≤ 1 V _{pp}	≤ 1 W	
Electrical connection	FCC 68/RJ45 appliance connector, 8 poles, male			
Sensor cable	8 poles plus shielding			
Cable length	≤ 100 meter (330 ft)			
Materials exposed to vacuum	Glass, Ni, NiFe, tungsten (tungsten version)			
Admissible temperature	Operation	Storage	Vacuum Connection ¹	
	5 to 60 °C	-20 to +65 °C	80 °C	
Mounting orientation	Any			
Weight	80g			

¹ In horizontal mounting position

Ordering Information	
Description	Part Number
PVG-500 Pirani, KF16	PVG500KF16
PVG-500 Pirani tungsten filament with setpoints, KF16	PVG500KF16S
PVG-502 Pirani nickel filament with setpoints, KF16 – <i>for corrosive applications</i>	PVG502KF16S
Accessories	
PVG-500 Replacement sensor (tungsten) – <i>recommended for most applications</i>	PVG500KF16RS
PVG-502 Replacement sensor (nickel) – <i>recommended for corrosive applications</i>	PVG502KF16RS

WWW.VARIANINC.COM/VACUUM

United States
 Varian Inc., Vacuum Technologies
 121 Hartwell Avenue
 Lexington, MA 02421 USA
 Tel: (781) 861 7200
 Fax: (781) 860 5437
 Toll Free 1 (800) 882 7426

Europe
 Varian Inc., Vacuum Technologies
 Via F.lli Varian 54
 10040 Leini, (Torino) Italy
 Tel: (39) 011 997 9 111
 Fax: (39) 011 997 9 350
 Toll Free 00 800 234 234 00



Agilent Technologies